

M
H₂₂



40
MARLOW
HUNTER
1973-2015

H₂₂ Specifications and Equipment

Rigging

Anodized aluminum mast and boom
 Boom vang
 Mainsail
 Mainsheet system
 Reefing system – mainsail
 Roller furling jib
 Running rigging
 Deck/hull/cockpit
 Aft mast carrier

Deck/Hull

FRP hull and deck construction
 Cuddy cabin
 Molded-in non-skid
 Hatchboard and lockable hatch
 Integral centerline foot rest in cockpit floor
 Hydraulic lifting centerboard
 Molded deck toe rail
 Opening ports with screens in cuddy cabin (2)
 Easy lift rudder system
 Mesh bags in cockpit for running rigging tails
 Cockpit fuel tank storage locker
 Motor mount
 Protective rubrail
 Stainless steel bow eye
 Stainless steel mooring cleats (4)
 Tiller extension

Reference Book

Reference book, *ASA Sailing Made Easy*

Optional Equipment

Cockpit hand holds
 Cockpit seat cushions
 Interior V-berth package
 Mainsheet traveler
 Mainsail cover
 Porta-potty
 Trailer spare tire
 Transshield™ shipping cover


Electric Power Package

Interior light, bow and stern light, mast light,
 bilge pump, battery charger, battery box,
 electrical panel

Performance Package

Asymmetrical spinnaker kit with sail and pole,
 cockpit handholds, mainsheet traveler

Standard Layout

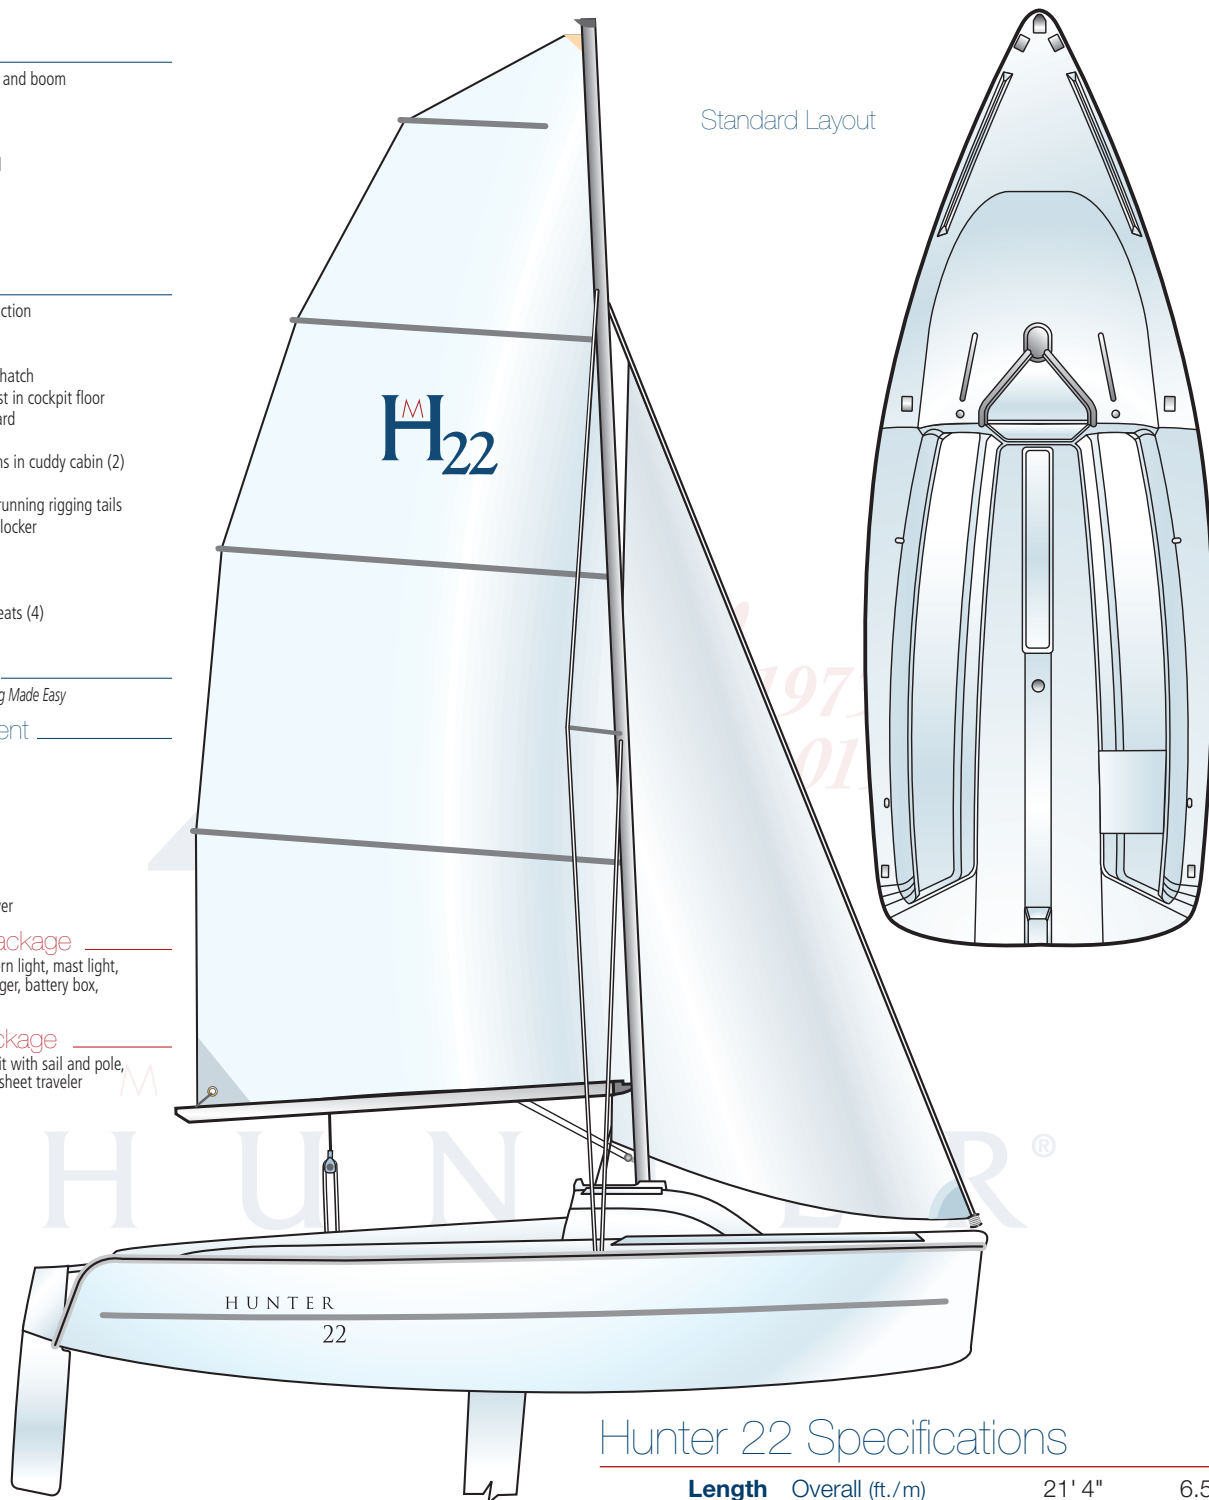

Hunter 22 Specifications

Length	Overall (ft./m)	21' 4"	6.50
Beam	(ft./m)	7' 11"	2.41
Draft	Board Up (ft./m)	12"	.30
	Board Down (ft./m)	3' 6"	1.07
Mast Height	Standard (ft./m)	31' 2"	9.50
Sail Area	(ft. ² /m ²)	293	27.13
Weight	Basic (lb./k)	2000	907.18
	Towing (lb./k)	2699	1224.25
Capacity	(lb./k)	1000	453.59



Marlow-Hunter, LLC reserves the right to modify or change, without notice, any materials, specifications, equipment and/or accessories. All measurements are approximate. Standard equipment may vary for products sold outside the United States.

