



H₁₈



National Customer Hotline USA 800.771.5556 • [w marlow-hunter.com](http://www.marlow-hunter.com) • [e sales@marlow-hunter.com](mailto:sales@marlow-hunter.com)

H₁₈ Specifications and Equipment

Rigging

Anodized aluminum mast and boom
Boom vang
Mainsail
Roller furling jib
Standing rigging

Deck/Hull


FRP hull and deck construction
Centerboard
Cuddy Cooler
Foam positive flotation
Heavy duty rub rail
Kick-up rudder
Removable drain plug
Self-bailing drain
Stainless steel bow eye
Stainless steel cleats (3)
Telescoping tiller extension
Trailer ratchet straps

Reference Book


Reference book, *ASA Sailing Made Easy*

Optional Equipment

Aft mast carrier
Cockpit seat cushions
Mainsail cover
Motor mount
Outboard motor bracket
Spinnaker kit
Transshield™ shipping cover
Trailer – galvanized trailer
Trailer – Tongue jack
Trailer spare tire

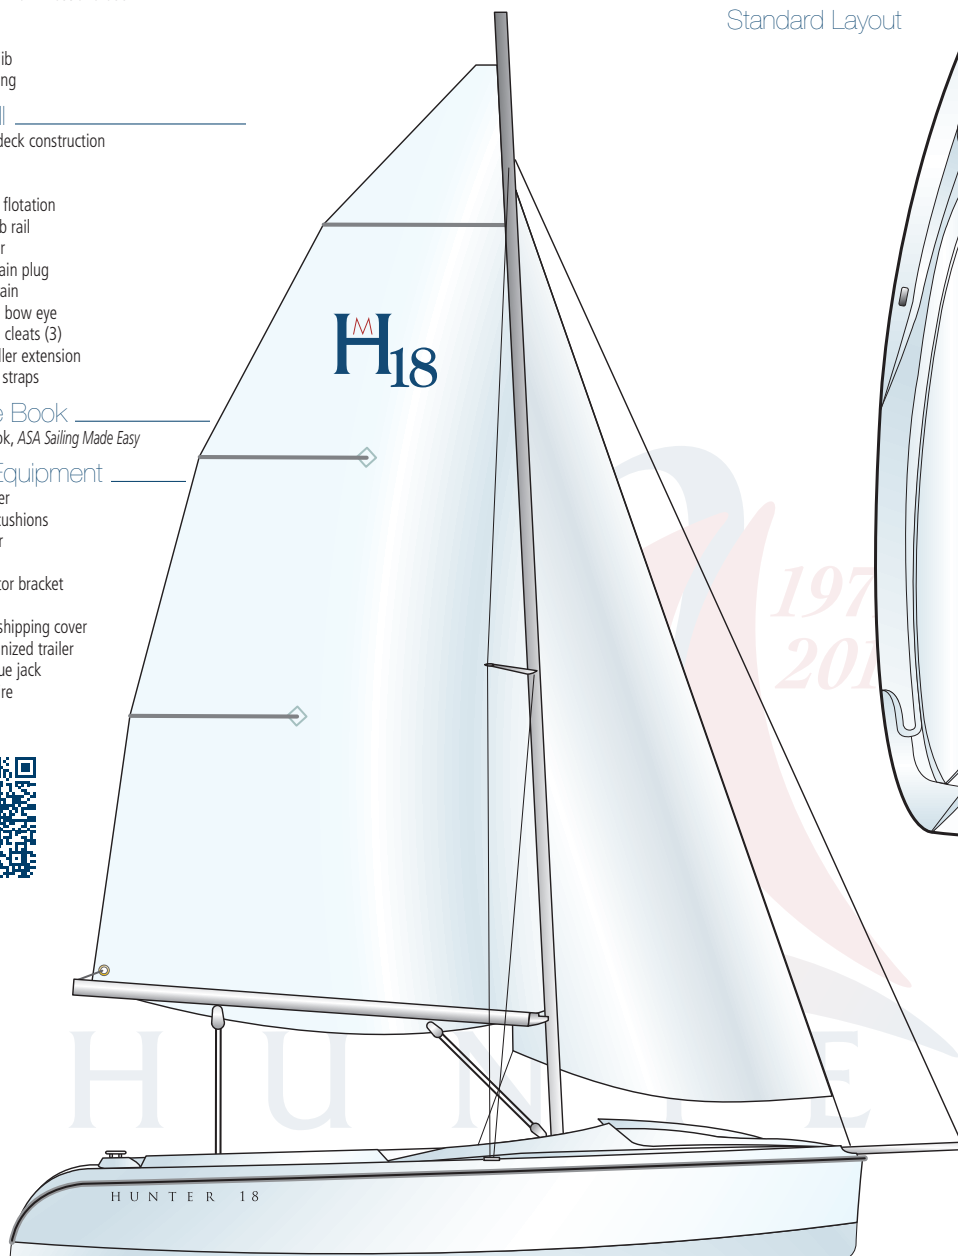

Standard Layout

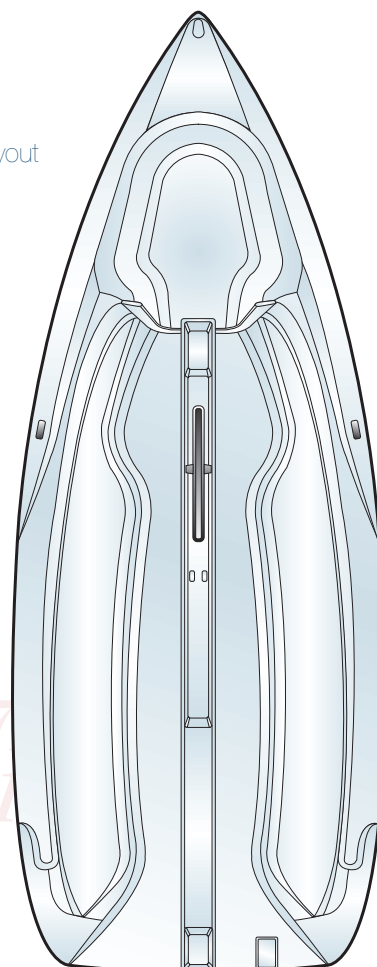

Hunter 18 Specifications

Length	Overall (ft./m)	18' 4"	5.59
Beam	(ft./m)	7' 2"	2.18
Draft	Board Up (ft./m)	6"	.15
	Board Down (ft./m)	4' 4"	1.32
Mast Height	Standard (ft./m)	24' 6"	7.47
Sail Area	Jib/Main (ft. ² /m ²)	170	15.79
	Gennaker (ft. ² /m ²)	211	19.60
Weight	Basic (lb./k)	836	379.20
	Towing (lb./k)	1143	518.46
Capacity	(lb./k)	712	322.96



Marlow-Hunter, LLC reserves the right to modify or change, without notice, any materials, specifications, equipment and/or accessories. All measurements are approximate. Standard equipment may vary for products sold outside the United States.

